

FIGURE 162 MIKRON MILLER VALVE


Stream Flow

SHOCK PROOF - CENTER GUIDED - CHECK VALVE
AMERICAN STANDARD - FLANGES AND DRILLING

QUOTATION SHEET & DIMENSIONS

Phone: 814-756-4858
 Fax: 814-756-5252

1" thru 24"

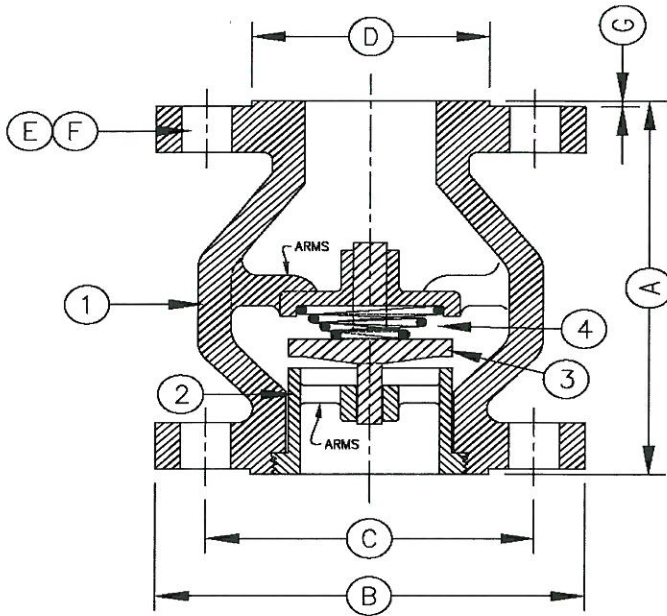

Installation instructions not necessary as arrow on label designated direction of flow.

No operating or maintenance instructions necessary.

Parts are threaded into the body.

Note I: Raised Face included in Face to Face dimension except 125# which is Flat Face.

Note II: Diameter of Bolt Holes 1/8" larger than diameter of Bolts.

MIKRON VALVE & MFG.
 The new home of
MILLER MANUFACTURING.

SIZE PRESSURE LBS. PARTS LIST MATERIAL

A	FACE TO FACE		1	BODY	
B	DIA. FLANGES		2	RING	
C	DIA. BOLT CIRCLE		3	DISC	
D	DIA. RAISED FACE		4	SPRING	
E	BOLTS - DIAMETER		5	WEIGHT	
F	DIA. BOLT HOLE				
G	HEIGHT RAISED FACE				

CUSTOMER: _____

ADDRESS: _____

JOB: _____ DATE: _____

ORDER NO: _____ REQ. NO: _____

TEMPERATURE: _____ PRESSURE: _____ MEDIA: _____

Please fill out the above information and fax to Mikron Valve. Our inside sales team will be more than happy to review your request and email or fax a quote.

If you have any questions please feel free to call.

Website: www.mikronvalve.com